




Ex d Soft Start

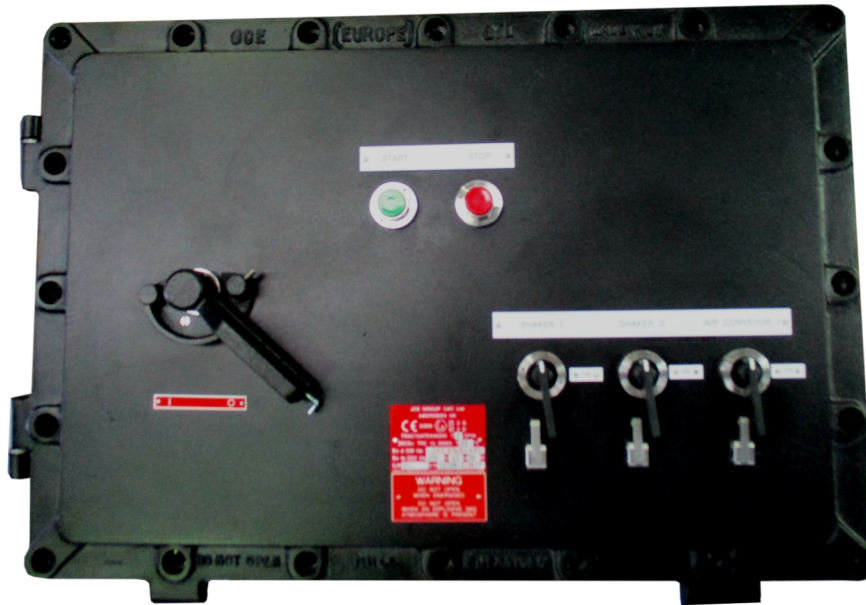

Our Ex d / Ex tb ATEX, IECEx and EAC compliant Soft Starters are rated from 7.5kW to 30kW. They are intended for use in areas made potentially hazardous by the presence of flammable liquids, gases or vapours and dusts (Zone 1, Zone 2, Zone 21 or Zone 22). Suitable for Groups IIB and IIIC.

Each Ex d / Ex tb Soft Starters is designed and manufactured to customer's specific requirements.

Please contact our [sales team](#) for further details and to obtain a quotation.